



NT82 Quick Couplings

Serving The Nuclear Industry

Canada 
www.thorburnflex.com

High Quality Custom Flexible Piping Systems



Thorburn Flex offers unmatched capabilities and expertise in applications engineering, design development and manufacture of custom flexible piping systems for PHWR/PWR nuclear power plants. Operating under a strategy of global presence, Thorburn Flex has structured and developed a specific nuclear business unit used to service this niche market sector. Through this nuclear business unit, our products consistently meet and exceed all quality design requirements of our PHWR/PWR nuclear reactor business partners.



NT82 Straight Through System

Thorburn's NT82 Series straight-through quick couplings are designed for use where minimum pressure drop is required and valving is not needed.

Advantages:

- High Flow - Low pressure drop
- Sizes 1/4" to 2"
- Proven ball-lock mechanism provides positive connections
- Sockets and plugs interchangeable with other manufacturers such as Hansen ST Non-Valved Straight-Through Series
- Can be designed, manufactured and registered (C/W CRN) to ASME B31.1, B51, CSA N285.2 and ASME Section III, Class 2, 3 & 6 Service
- Standard Material - Brass (ASTM B16/B21) & 316 Stainless Steel

NT82 Flow Rate & Pressure Drop Charts

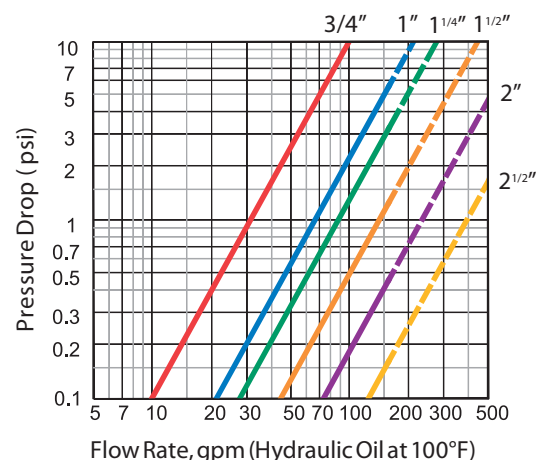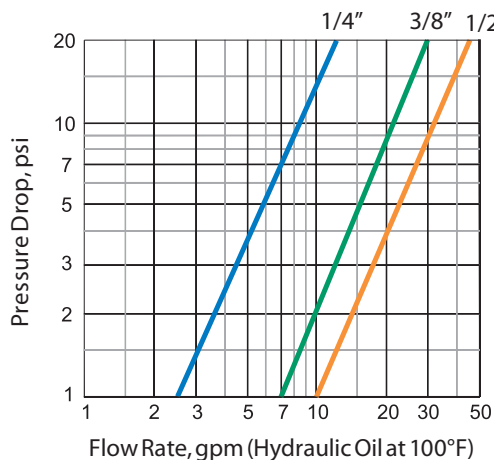

NT82 Series Technical Data



Dimensional Information

Nominal Size	Thread	A		B		C		D		E		F		G		H		H1		H2	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
1/4	1/4-18	1.72	43.7	0.97	24.6	1.56	39.6	0.65	16.5	1.50	38.1	0.97	24.6	1.45	36.8	0.79	20.1	0.81	20.6	0.69	17.5
3/8	3/8-18	1.75	44.5	1.16	29.5	1.69	42.9	0.79	20.1	1.59	40.4	1.16	29.5	1.63	41.4	0.94	23.9	1.00	25.4	0.81	20.6
1/2	1/2-14	2.03	51.6	1.34	34.0	2.01	51.1	1.01	25.7	1.91	48.5	1.34	34.0	1.92	48.8	1.15	29.2	1.13	28.7	1.00	25.4
3/4	3/4-14	2.22	56.4	1.72	43.7	2.20	55.9	1.23	31.2	2.06	52.3	1.72	43.7	2.01	51.1	1.37	34.8	1.44	36.6	1.19	30.2
1	1-11 1/2	2.53	64.3	2.03	51.6	2.49	63.2	1.59	40.4	2.33	59.2	2.03	51.6	2.21	56.1	1.80	45.7	1.75	44.5	1.56	39.6
1 1/4	1 1/4-11 1/2					2.72	69.1	2.02	51.3	2.44	62.0	2.50	63.5	2.34	59.4	2.31	58.7	2.00	50.8	2.00	50.8
1 1/2	1 1/2-11 1/2					3.31	84.1	2.60	66.0	2.88	73.2	3.13	79.5	2.88	73.2	2.60	66.0	2.60	66.0	2.25	57.2
2	2-11 1/2					3.50	88.9	3.18	80.8	3.09	78.5	3.75	95.3	3.03	77.0	3.18	80.8	3.00	76.2	2.75	69.9
2 1/2	2 1/2-8					4.24	107.7	3.75	95.3	3.44	87.4	4.50	114.3	3.37	85.6	3.75	95.3	3.50	88.9	3.25	82.6

Pressure Rating

Nominal Size	Stainless Steel				Brass			
	Working Pressure		Minimum Burst		Working Pressure		Minimum Burst	
	psi	bar	psi	bar	psi	bar	psi	bar
1/4	5200	359	20800	1434	3640	251	14560	1004
3/8	2800	193	11200	772	1960	135	7840	541
1/2	2250	155	9000	621	1575	109	6300	434
3/4	1750	121	7000	483	1225	85	4900	338
1	1250	86	5000	345	875	60	3500	241
1 1/4	1250	86	5000	345	875	60	3500	241
1 1/2	1250	86	5000	345	875	60	3500	241
2	1250	86	5000	345	875	60	3500	241
2 1/2	900	62	3600	248	630	43	2520	174



How to Order NT82 Quick Couplings

Part Number Example & Description

(Part number must follow the order listed below)

NT82-12-C-S6-FP-B-SL-NC2


NT82 TYPE	12 SIZE	C COUPLING HALF	S6 MATERIAL	FP END TYPE FITTING	B SEAL	SL OPTIONS	NC2
NT82	04= 1/4" 06= 3/8" 08= 1/2" 12= 3/4" 16= 1" 20= 1 1/4" 24= 1 1/2" 32= 2" 40= 2 1/2" 48= 3"	C= Coupler N= Nipple DP= Dust Plug DC= Dust Cap	B=Brass S6=SS316	FP= Female NPT XX= Special End	V=Viton B= Buna N E= EPDM	SL= Sleeve Lock NV= Non Valved	NC3= Class 3 NC2= Class 2 Blank= Class 6

THORBURN FLEX - Canada
 165 Oneida, Pointe-Claire, Quebec
 Canada, H9R 1A9
 Tel: +1-514-695-8710
 Fax: +1-514-695-1321
 sales@thorburnflex.com



ISIR Romania | CNCAN Romania | EN 13480-2002 | HAF 604 China | TSG China
 (CRN for all Canadian Provinces)

Thorburn's Global Presence

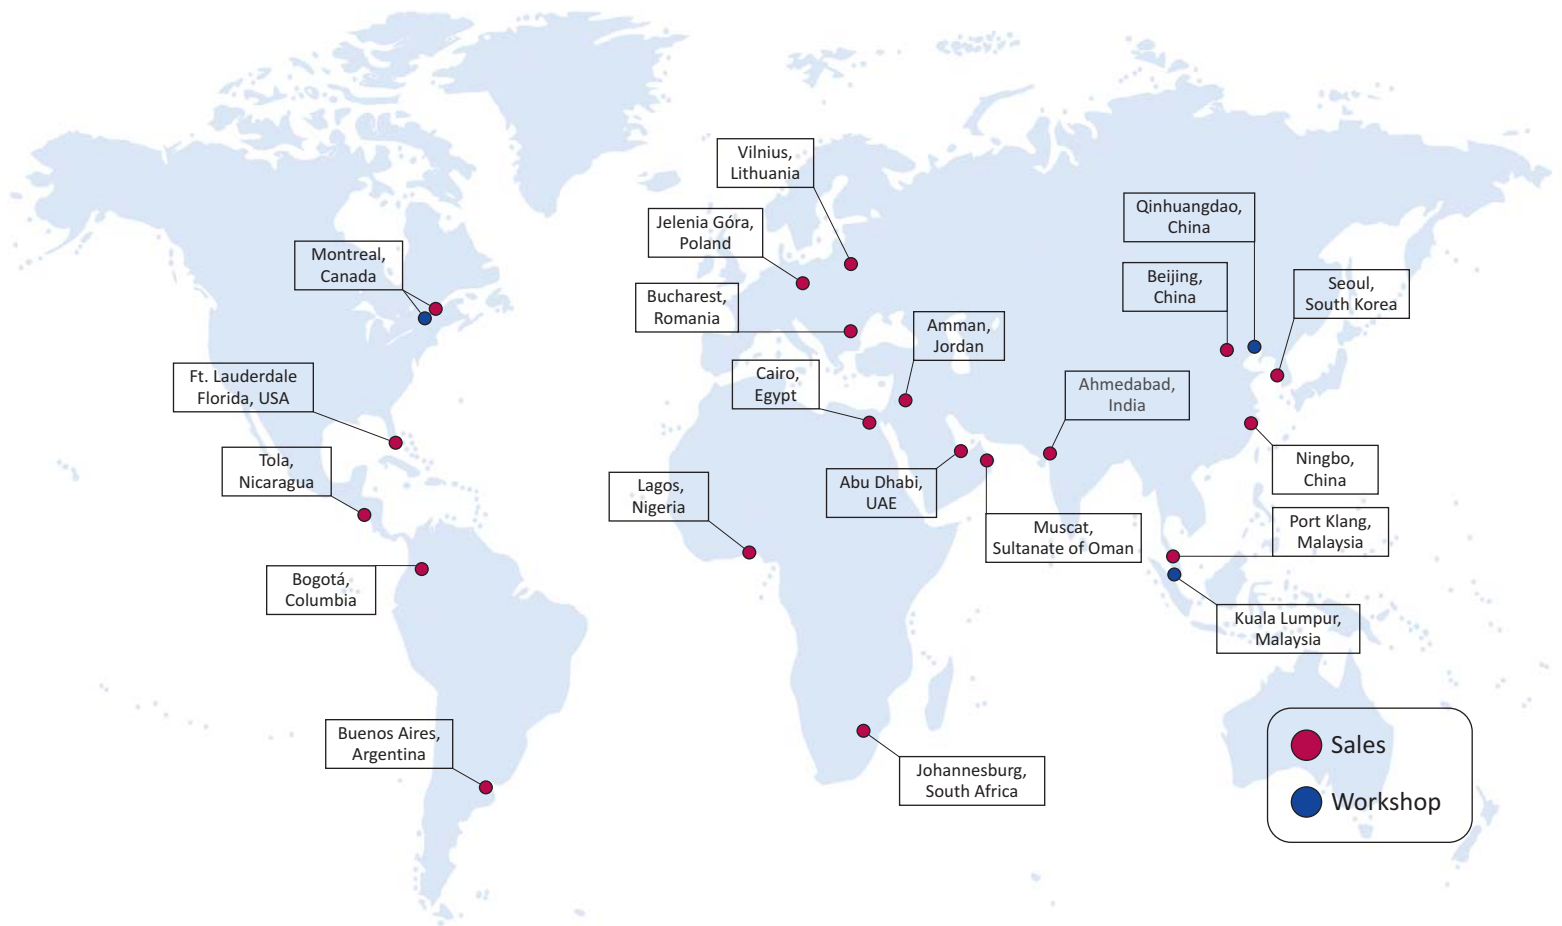

www.thorburnflex.com